U.S. DEPARTMENT OF HOMELAND SECURITY Federal Emergency Management Agency

National Flood Insurance Program

OMB No. 1660-0008 Expiration Date: November 30, 2022

ELEVATION CERTIFICATE

Important: Follow the instructions on pages 1-9.

Copy all pages of this Elevation Certificate and all attachments for (1) community official, (2) insurance agent/company, and (3) building owner.

SECTION A - PROPERTY INFORMATION						FOR INSUF	RANCE COMPANY USE
A1. Building Owner's Name Policy Number: WB COASTAL DEVELOPMENT LLC						ber:	
A2 Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Company NAIC Number: 900 Second Street							AIC Number:
City Carolina Beac	City State ZIP Code Carolina Beach North Carolina 28428						
1 ' '	A3. Property Description (Lot and Block Numbers, Tax Parcel Number, Legal Description, etc.) Parcel R09010-032-016-000, New Hanover County Registry						
A4. Building Use	A4. Building Use (e.g., Residential, Non-Residential, Addition, Accessory, etc.) Residential						
A5. Latitude/Long	itude: Lat. 3	4.02611°N	Long7	7.8972°W	 Horizont	al Datum: NAD 1	1927 × NAD 1983
A6. Attach at leas	t 2 photograp	hs of the building if th	e Certific	ate is being ι	used to obtain flo	od insurance.	
A7. Building Diag	am Number	6					
A8. For a building	with a crawls	pace or enclosure(s):					
a) Square for	otage of crawl	space or enclosure(s)		184.00 sq ft		
b) Number of	permanent flo	ood openings in the c	rawlspace	e or enclosur	e(s) within 1.0 for	ot above adjacent gra	ade <u>4</u>
c) Total net a	rea of flood o	penings in A8.b		800.00 sq ir	ı		
d) Engineere	d flood openir	ngs? 🗷 Yes 🗌	No				
A9. For a building	with an attach	ned garage:					
a) Square foo	tage of attack	ned garage		0.00 sq fi	:		
b) Number of	permanent flo	ood openings in the a	ttached g	arage within	1.0 foot above a	djacent grade 0	
c) Total net a	rea of flood o	penings in A9.b		0.00 sc	in		
d) Engineere	d flood openin	igs? ☐ Yes 🕱	No				
		ECTION B - FLOOD	INSURA			FORMATION	T
l e	B1. NFIP Community Name & Community Number B2. County Name B3. State Town of Carolina Beach, 375347 New Hanover North Carolina						1
B4. Map/Panel Number	B5. Suffix	B6. FIRM Index Date	Effe	RM Panel ective/	B8. Flood Zone(s)	B9. Base Flood E (Zone AO, us	levation(s) e Base Flood Depth)
3720313000 K 12-06-2019 Revised Date 08-28-2018 AE 11.0'							
B10. Indicate the source of the Base Flood Elevation (BFE) data or base flood depth entered in Item B9:							
☐ FIS Profile ☐ FIRM ☐ Community Determined ☒ Other/Source: FRIS WEB SITE							
B11. Indicate elevation datum used for BFE in Item B9: NGVD 1929 X NAVD 1988 Other/Source:							
B12. Is the building located in a Coastal Barrier Resources System (CBRS) area or Otherwise Protected Area (OPA)? 🔲 Yes 💢 No							
Designation	Designation Date: CBRS OPA						
	-						

ELEVATION CERTIFICATE

OMB No. 1660-0008 Expiration Date: November 30, 2022

IMPORTANT: In these spaces, copy the correspond	FOR INSURANCE COMPANY USE				
Building Street Address (including Apt., Unit, Suite, an 900 Second Street	d/or Bldg. No.) or P.O. Ro	ute and Box No.	Policy Number:		
City Carolina Beach	State ZIF North Carolina 284	Code 28	Company NAIC Number		
SECTION C - BUILDING ELEVATION INFORMATION (SURVEY REQUIRED)					
 C1. Building elevations are based on: Construction Drawings* Building Under Construction* Finished Construction *A new Elevation Certificate will be required when construction of the building is complete. C2. Elevations – Zones A1–A30, AE, AH, A (with BFE), VE, V1–V30, V (with BFE), AR, AR/A, AR/AE, AR/A1–A30, AR/AH, AR/AO. Complete Items C2.a–h below according to the building diagram specified in Item A7. In Puerto Rico only, enter meters. Benchmark Utilized: GPS OBSERVATION Vertical Datum: NAVD '88 					
Indicate elevation datum used for the elevations ☐ NGVD 1929 ☒ NAVD 1988 ☐ Other	3 35 1	>vv.			
Datum used for building elevations must be the		BFE.	Check the measurement used.		
 a) Top of bottom floor (including basement, cra 	wispace, or enclosure floo	r)	6.2 X feet meters		
b) Top of the next higher floor			17.2 X feet meters		
 Bottom of the lowest horizontal structural me 	mber (V Zones only)	-	16.3 × feet meters		
d) Attached garage (top of slab)		Section and distribution and the second	N/A ✓ feet ✓ meters		
 e) Lowest elevation of machinery or equipment (Describe type of equipment and location in 			17.2 X feet meters		
f) Lowest adjacent (finished) grade next to buil	ding (LAG)	<u>u</u>	5.9 × feet meters		
g) Highest adjacent (finished) grade next to bui	lding (HAG)		5.9 X feet meters		
 h) Lowest adjacent grade at lowest elevation of structural support 	deck or stairs, including	Victoria de la composición dela composición de la composición de la composición de la composición dela composición dela composición dela composición de la c	6.2 × feet meters		
SECTION D - SURVEY	OR, ENGINEER, OR AR	CHITECT CERTIF	CATION		
This certification is to be signed and sealed by a land I certify that the information on this Certificate repres statement may be punishable by fine or imprisonment	ents my best efforts to inte nt under 18 U.S. Code, Se	erpret the data availa ction 1001.	ble. I understand that any false		
Were latitude and longitude in Section A provided by	a licensed land surveyor?	Yes ∐No	Check here if attachments.		
Certifier's Name STEVEN L BUIE	License Number L-3402		WHIT CAROLINA		
Title PRESIDENT			SE SSION A		
Company Name PORT CITY LAND SURVEYING, PLLC			SEAL 13402		
Address 1144 SHIPYARD BLVD			SEAL L3402		
City WILMINGTON	State North Carolina	ZIP Code 28412	WEVEN L'AMIN		
Signature L. Rui	Date 09-19-2023	Telephone (910) 791-0080	Ext.		
Copy all pages of this Elevation Certificate and all attac	hments for (1) community of	official, (2) insurance	agent/company, and (3) building owner.		
Comments (including type of equipment and location C2e: HVAC units on platform.	, per C2(e), if applicable)				

ELEVATION CERTIFICATE

OMB No. 1660-0008 Expiration Date: November 30, 2022

IMPORTANT: In these spaces, copy the corres	FOR INSURANCE COMPANY USE				
Building Street Address (including Apt., Unit, Suit 900 Second Street	e, and/or Bldg. No.) or P.O		Policy Number:		
City Carolina Beach	State North Carolina	ZIP Code 28428	Company NAIC Number		
SECTION E – BUILDIN FOR	G ELEVATION INFORM ZONE AO AND ZONE A	ATION (SURVEY NOT (WITHOUT BFE)	REQUIRED)		
For Zones AO and A (without BFE), complete Items E1–E5. If the Certificate is intended to support a LOMA or LOMR-F request, complete Sections A, B, and C. For Items E1–E4, use natural grade, if available. Check the measurement used. In Puerto Rico only, enter meters.					
E1. Provide elevation information for the following the highest adjacent grade (HAG) and the lot a) Top of bottom floor (including basement,			r the elevation is above or below		
crawlspace, or enclosure) is b) Top of bottom floor (including basement,		feet	rs 🗌 above or 🗌 below the HAG.		
crawlspace, or enclosure) is		feet meter			
E2. For Building Diagrams 6–9 with permanent fl the next higher floor (elevation C2.b in the diagrams) of the building is	lood openings provided in s	Section A Items 8 and/or			
E3. Attached garage (top of slab) is		feet	rs 🔲 above or 🔲 below the HAG.		
E4. Top of platform of machinery and/or equipme servicing the building is	ent 	feet mete	rs 🔲 above or 🔲 below the HAG.		
E5. Zone AO only: If no flood depth number is av floodplain management ordinance? Ye	vailable, is the top of the bos No Unknown.	ottom floor elevated in ac The local official must	cordance with the community's certify this information in Section G.		
SECTION F - PROPERTY	OWNER (OR OWNER'S	REPRESENTATIVE) C	ERTIFICATION		
The property owner or owner's authorized repres- community-issued BFE) or Zone AO must sign he	entative who completes Seere. The statements in Sec	ections A, B, and E for Zo tions A, B, and E are co	one A (without a FEMA-issued or rect to the best of my knowledge.		
Property Owner or Owner's Authorized Represen	tative's Name				
Address	City	Si	ate ZIP Code		
Signature	Date	e Te	elephone		
Comments					
			☐ Check here if attachments.		

ELEVATION CERTIFICATE

OMB No. 1660-0008 Expiration Date: November 30, 2022

IMPORTANT: In these spaces, copy the corre	FOR INSURANCE COMPANY USE					
Building Street Address (including Apt., Unit, St 900 Second Street	Policy Number:					
City Carolina Beach	State North Carolina	ZIP Code 28428	Company NAIC Number			
SECTIO	ON G - COMMUNITY INFOR	RMATION (OPTIONAL)				
The local official who is authorized by law or ordinance to administer the community's floodplain management ordinance can complete Sections A, B, C (or E), and G of this Elevation Certificate. Complete the applicable item(s) and sign below. Check the measurement used in Items G8–G10. In Puerto Rico only, enter meters.						
G1. The information in Section C was tak engineer, or architect who is authoriz data in the Comments area below.)	en from other documentation ed by law to certify elevation	n that has been signed a n information. (Indicate th	nd sealed by a licensed surveyor, le source and date of the elevation			
G2. A community official completed Section Zone AO.	on E for a building located in	n Zone A (without a FEM	A-issued or community-issued BFE)			
G3. The following information (Items G4-	G10) is provided for commu	nity floodplain managem	ent purposes.			
G4. Permit Number	G5. Date Permit Issued		Date Certificate of Compliance/Occupancy Issued			
G7. This permit has been issued for:	New Construction Sub	stantial Improvement				
G8. Elevation of as-built lowest floor (including of the building:	g basement)	feet	meters Datum			
G9. BFE or (in Zone AO) depth of flooding at	the building site:	fee	: [] meters Datum			
G10. Community's design flood elevation:			t meters Datum			
Local Official's Name	Titl	e				
Community Name	Te	ephone				
Signature	Da	te				
Comments (including type of equipment and loa	cation, per C2(e), if applicab	le)				
			Check here if attachments.			

BUILDING PHOTOGRAPHS

ELEVATION CERTIFICATE

See Instructions for Item A6.

OMB No. 1660-0008

Expiration Date: November 30, 2022

IMPORTANT: In these spaces, co	FOR INSURANCE COMPANY USE Policy Number:		
Building Street Address (including a 900 Second Street			
City	State	ZIP Code	Company NAIC Number
Carolina Beach	North Carolina	28428	

If using the Elevation Certificate to obtain NFIP flood insurance, affix at least 2 building photographs below according to the instructions for Item A6. Identify all photographs with date taken; "Front View" and "Rear View"; and, if required, "Right Side View" and "Left Side View." When applicable, photographs must show the foundation with representative examples of the flood openings or vents, as indicated in Section A8. If submitting more photographs than will fit on this page, use the Continuation Page.



Photo One

Photo One Caption Front View 09-19-23 Clear Photo One

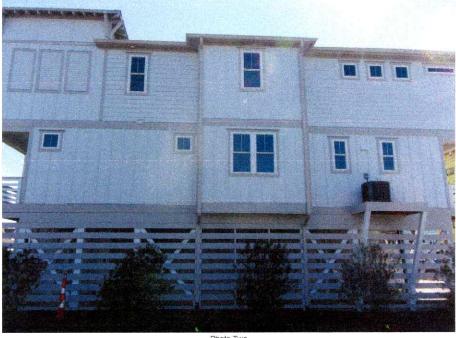


Photo Two

Photo Two Caption Right Side View 09-19-23

Clear Photo Two

BUILDING PHOTOGRAPHS

ELEVATION CERTIFICATE

Continuation Page

OMB No. 1660-0008 Expiration Date: November 30, 2022

IMPORTANT: In these spaces, copy the c	FOR INSURANCE COMPANY USE		
Building Street Address (including Apt., Unit 900 Second Street	t, Suite, and/or Bldg. No.) or F	P.O. Route and Box No.	Policy Number:
City	State	ZIP Code	Company NAIC Number
Carolina Beach	North Carolina	28428	

If submitting more photographs than will fit on the preceding page, affix the additional photographs below. Identify all photographs with: date taken; "Front View" and "Rear View"; and, if required, "Right Side View" and "Left Side View." When applicable, photographs must show the foundation with representative examples of the flood openings or vents, as indicated in Section A8.



Photo Three

Photo Three Caption Rear View 09-19-23

Clear Photo Three



Photo Four

Photo Four Caption Left Side View

Clear Photo Four



ICC-ES Evaluation Report

ICC-ES | (800) 423-6587 | (562) 699-0543 | www.icc-es.org

ESR-2074

Reissued 02/2023 This report is subject to renewal 02/2025.

DIVISION: 08 00 00—OPENINGS

SECTION: 08 95 43—VENTS/FOUNDATION FLOOD VENTS

REPORT HOLDER:

SMART VENT PRODUCTS, INC.

EVALUATION SUBJECT:

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514 FLOOD VENT SEALING KIT #1540-526



"2014 Recipient of Prestigious Western States Seismic Policy Council (WSSPC) Award in Excellence"



s use.

ICC-ES Evaluation Reports are not to be construed as representing aesthetics or any other attributes not specifically addressed, nor are they to be construed as an endorsement of the subject of the report or a recommendation for its use. There is no warranty by ICC Evaluation Service, LLC, express or implied, as to any finding or other matter in this report, or as to any product covered by the report.











 I-Codes provide recognition in all 50 states

Specialty code recognition

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

ICC-ES Evaluation Report ESR-2074

DIVISION: 08 00 00—OPENINGS

Section: 08 95 43—Vents/Foundation Flood Vents

REPORT HOLDER:

SMART VENT PRODUCTS, INC.

EVALUATION SUBJECT:

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514 FLOOD VENT SEALING KIT #1540-526

1.0 EVALUATION SCOPE

Compliance with the following codes:

- 2021, 2018, 2015, 2012, 2009 and 2006 International Building Code[®] (IBC)
- 2021, 2018, 2015, 2012, 2009 and 2006 International Residential Code® (IRC)
- 2021 and 2018 International Energy Conservation Code[®] (IECC)
- 2013 Abu Dhabi International Building Code (ADIBC)†

 $^{\dagger}\text{The ADIBC}$ is based on the 2009 IBC. 2009 IBC code sections referenced in this report are the same sections in the ADIBC.

Properties evaluated:

- Physical operation
- Water flow

2.0 USES

The Smart Vent® units are engineered mechanically operated flood vents (FVs) employed to equalize hydrostatic pressure on walls of enclosures subject to rising or falling flood waters. Certain models also allow natural ventilation.

3.0 DESCRIPTION

3.1 General:

When subjected to rising water, the Smart Vent® FVs internal floats are activated, then pivot open to allow flow in either direction to equalize water level and hydrostatic pressure from one side of the foundation to the other. The FV pivoting door is normally held in the closed position by a buoyant release device. When subjected to rising water, the buoyant release device causes the unit to unlatch, allowing

Reissued February 2023

This report is subject to renewal February 2025.

the door to rotate out of the way and allow flow. The water level stabilizes, equalizing the lateral forces. Each unit is fabricated from stainless steel. Smart Vent® Automatic Foundation Flood Vents are available in various models and sizes as described in Table 1. The SmartVENT® Stacking Model #1540-511 and FloodVENT® Stacking Model #1540-521 units each contain two vertically arranged openings per unit

3.2 Engineered Opening:

The FVs comply with the design principle noted in Section 2.7.2.2 and Section 2.7.3 of ASCE/SEI 24-14 [Section 2.6.2.2 of ASCE/SEI 24-05 (2012, 2009, 2006 IBC and IRC)] for a maximum rate of rise and fall of 5.0 feet per hour (0.423 mm/s). In order to comply with the engineered opening requirement of ASCE/SEI 24, Smart Vent FVs must be installed in accordance with Section 4.0.

3.3 Ventilation:

The SmartVENT® Model #1540-510 and SmartVENT® Overhead Door Model #1540-514 both have screen covers with ¹/₄-inch-by-¹/₄-inch (6.35 by 6.35 mm) openings, yielding 51 square inches (32 903 mm²) of net free area to supply natural ventilation. The SmartVENT® Stacking Model #1540-511 consists of two Model #1540-510 units in one assembly, and provides 102 square inches (65 806 mm²) of net free area to supply natural ventilation. Other FVs described in this report do not offer natural ventilation.

3.4 Flood Vent Sealing Kit:

The Flood Vent Sealing Kit Model #1540-526 is used with SmartVENT® Model #1540-520. It is a Homasote 440 Sound Barrier® (ESR-1374) insert with 21 – 2-inch-by-2-inch (51 mm x 51 mm) squares cut in it. See Figure 4.

4.0 DESIGN AND INSTALLATION

4.1 SmartVENT® and FloodVENT®:

SmartVENT® and FloodVENT® are designed to be installed into walls or overhead doors of existing or new construction from the exterior side. Installation of the vents must be in accordance with the manufacturer's instructions, the applicable code and this report. Installation clips allow mounting in masonry and concrete walls of any thickness. In order to comply with the engineered opening design principle noted in Section 2.7.2.2 and 2.7.3 of ASCE/SEI 24-14 [Section 2.6.2.2 of ASCE/SEI 24-05 (2012, 2009, 2006 IBC and IRC)], the Smart Vent® FVs must be installed as follows:





- With a minimum of two openings on different sides of each enclosed area.
- With a minimum of one FV for every 200 square feet (18.6 m²) of enclosed area, except that the SmartVENT® Stacking Model #1540-511 and FloodVENT® Stacking Model #1540-521 must be installed with a minimum of one FV for every 400 square feet (37.2 m²) of enclosed area.
- Below the base flood elevation.
- With the bottom of the FV located a maximum of 12 inches (305.4 mm) above the higher of the final grade or floor and finished exterior grade immediately under each opening.

4.2 Flood Vent Sealing Kit

The Flood Vent Sealing Kit Model 1540-526 is used in conjunction with FloodVENT® Model #1540-520. When installed and tested in accordance with ASTM E283, the FV and Flood Vent Sealing Kit assembly have an air leakage rate of less than 0.2 cubic feet per minute per lineal foot (18.56 l/min per lineal meter) at a pressure differential of 1 pound per square foot (50 Pa) based on 12.58 lineal feet (3.8 lineal meters) contained by the Flood Vent Sealing Kit.

5.0 CONDITIONS OF USE

The Smart Vent® FVs described in this report comply with, or are suitable alternatives to what is specified in, those codes listed in Section 1.0 of this report, subject to the following conditions:

5.1 The Smart Vent® FVs must be installed in accordance with this report, the applicable code and the

- manufacturer's installation instructions. In the event of a conflict, the instructions in this report govern.
- **5.2** The Smart Vent[®] FVs must not be used in the place of "breakaway walls" in coastal high hazard areas, but are permitted for use in conjunction with breakaway walls in other areas.

6.0 EVIDENCE SUBMITTED

- 6.1 Data in accordance with the ICC-ES Acceptance Criteria for Mechanically Operated Flood Vents (AC364), dated August 2015 (editorially revised February 2021).
- 6.2 Test report on air infiltration in accordance with ASTM E283.

7.0 IDENTIFICATION

- 7.1 The Smart VENT® models and the Flood Vent Sealing Kit described in this report must be identified by a label bearing the manufacturer's name (Smartvent Products, Inc.), the model number, and the evaluation report number (ESR-2074).
- **7.2** The report holder's contact information is the following:

SMART VENT PRODUCTS, INC. 19 MANTUA ROAD MOUNT ROYAL, NEW JERSEY 08061 (877) 441-8368 www.smartvent.com info@smartvent.com

TABLE 1—MODEL SIZES

MODEL NAME	MODEL NUMBER	MODEL SIZE (in.)	COVERAGE (sq. ft.)
FloodVENT®	1540-520	15 ³ / ₄ " X 7 ³ / ₄ "	200
SmartVENT®	1540-510	15 ³ / ₄ " X 7 ³ / ₄ "	200
FloodVENT® Overhead Door	1540-524	15 ³ / ₄ " X 7 ³ / ₄ "	200
SmartVENT® Overhead Door	1540-514	15 ³ / ₄ " X 7 ³ / ₄ "	200
Wood Wall FloodVENT®	1540-570	14" X 8 ³ / ₄ "	200
Wood Wall FloodVENT® Overhead Door	1540-574	14" X 8 ³ / ₄ "	200
SmartVENT® Stacker	1540-511	16" X 16"	400
FloodVent® Stacker	1540-521	16" X 16"	400

For SI: 1 inch = 25.4 mm; 1 square foot = m^2

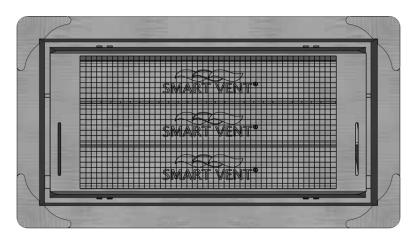


FIGURE 1—SMART VENT: MODEL 1540-510

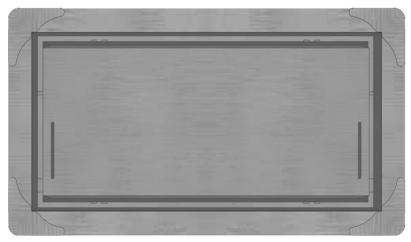


FIGURE 2—SMART VENT MODEL 1540-520



FIGURE 3—SMART VENT: SHOWN WITH FLOOD DOOR PIVOTED OPEN

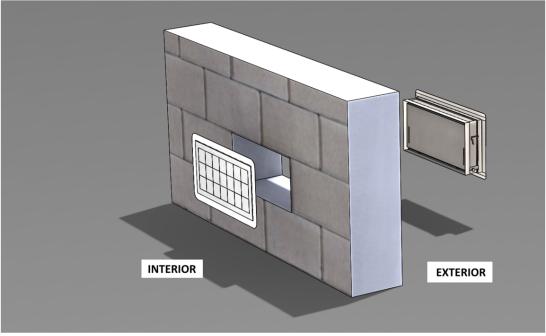


FIGURE 4—FLOOD VENT SEALING KIT



ICC-ES Evaluation Report

ESR-2074 CBC and CRC Supplement

Reissued February 2023

This report is subject to renewal February 2025.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 00 00—OPENINGS

Section: 08 95 43—Vents/Foundation Flood Vents

REPORT HOLDER:

SMART VENT PRODUCTS, INC.

EVALUATION SUBJECT:

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-524; #1540-524; #1540-514
FLOOD VENT SEALING KIT #1540-526

1.0 REPORT PURPOSE AND SCOPE

Purpose:

The purpose of this evaluation report supplement is to indicate that Smart Vent® Automatic Foundation Flood Vents, described in ICC-ES evaluation report ESR-2074, have also been evaluated for compliance with codes noted below.

Applicable code editions:

■ 2019 California Building Code (CBC)

For evaluation of applicable chapters adopted by the California Office of Statewide Health Planning and Development (OSHPD) AKA: California Department of Health Care Access and Information (HCAI) and the Division of State Architect (DSA), see Sections 2.1.1 and 2.1.2 below.

■ 2019 California Residential Code (CRC)

2.0 CONCLUSIONS

2.1 CBC:

The Smart Vent® Automatic Foundation Flood Vents, described in Sections 2.0 through 7.0 of the evaluation report ESR-2074, comply with 2019 CBC Chapter 12, provided the design and installation are in accordance with the 2018 *International Building Code*® (IBC) provisions noted in the evaluation report and the additional requirements of CBC Chapters 12 and 16, as applicable.

2.1.1 OSHPD:

The applicable OSHPD Sections and Chapters of the CBC are beyond the scope of this supplement.

2.1.2 DSA:

The applicable DSA Sections and Chapters of the CBC are beyond the scope of this supplement.

2.2 CRC:

The Smart Vent® Automatic Foundation Flood Vents, described in Sections 2.0 through 7.0 of the evaluation report ESR-2074, comply with the 2019 CRC, provided the design and installation are in accordance with the 2018 *International Residential Code*® (IRC) provisions noted in the evaluation report.

This supplement expires concurrently with the evaluation report, reissued February 2023.





ICC-ES Evaluation Report

ESR-2074 FBC Supplement

Reissued February 2023
This report is subject to renewal February 2025.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 00 00—OPENINGS

Section: 08 95 43—Vents/Foundation Flood Vents

REPORT HOLDER:

SMART VENT PRODUCTS, INC.

EVALUATION SUBJECT:

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-524; #1540-524; #1540-514 FLOOD VENT SEALING KIT #1540-526

1.0 REPORT PURPOSE AND SCOPE

Purpose:

The purpose of this evaluation report supplement is to indicate that Smart Vent® Automatic Foundation Flood Vents, described in ICC-ES evaluation report ESR-2074, have also been evaluated for compliance with the codes noted below.

Applicable code editions:

- 2020 Florida Building Code—Building
- 2020 Florida Building Code—Residential

2.0 CONCLUSIONS

The Smart Vent® Automatic Foundation Flood Vents, described in Sections 2.0 through 7.0 of the evaluation report ESR-2074, comply with the *Florida Building Code—Building and the Florida Building Code—Residential*, provided the design requirements are determined in accordance with the *Florida Building Code—Building* or the *Florida Building Code—Residential*, as applicable. The installation requirements noted in ICC-ES evaluation report ESR-2074 for 2018 *International Building Code®* meet the requirements of the *Florida Building Code—Building* or the *Florida Building Code—Residential*, as applicable.

Use of the Smart Vent® Automatic Foundation Flood Vents has also been found to be in compliance with the High-Velocity Hurricane Zone provisions of the *Florida Building Code—Building* and the *Florida Building Code—Residential*.

For products falling under Florida Rule 61G20-3, verification that the report holder's quality assurance program is audited by a quality assurance entity approved by the Florida Building Commission for the type of inspections being conducted is the responsibility of an approved validation entity (or the code official when the report holder does not possess an approval by the Commission).

This supplement expires concurrently with the evaluation report, reissued February 2023.

